

### ÇİFTLİKLERDE TAM FAYDA

www.kocaksan.com





# MANURE > SCRAPER





Koçaksan scrapers provide healthy and clear environment for your animals without disturbing them by scraping periodically. Our manure scrapers have the automatic working time arragement system and the stop time system to start and stop according to user prefer.

You may choose the appropriate type of two diffirent scraper according your farm conditions and company prefer.

TYPE	CHAINED
NUMBER OF ROAD	2
DRIVE UNIT NUMBER	1
SCRAPER WING	REGULATABLE ACCORDING TO SIZE OF CHANNEL
<b>ENGINE POWER</b>	0.55 - 1.5 kw
MATERIAL	HEAT TREATED CHAIN 13 mm
HEIGHT	17 cm













TYPE	ISKOTA ROPE
NUMBER OF ROAD	2
DRIVE UNIT NUMBER	2
SCRAPER WINGS	REGULATABLE ACCORDING TO SIZE OF CHANNEL
ENGINE POWER	0.55 – 1.5 Kw
ROPE TYPE	22 – 26 mm ISKOTA rope
HEIGHT	17cm

Koçaksan ıskota rope manure scraper one of the other.

This scraper system can be arrange according to one or two alley. Our manure scrapers have the automatic working time arragement system and the stop time system to start and stop according to user prefer. You may choose the appropriate type of two diffirent scraper according your farm conditions and company prefer.











Koçaksan manure seperator have been created to allocate solid and liquid materials. Thanks to design not only setup and launch but also repair and maintenence is easy and simple. There are two models which are stainless steel and cast iron. Farms face with important problems cause of the so much fertilizer. Fertilizer should proceed appropriate according to legal laws. Conventional manure proceeding systems take so much time, labour force and require serious invesment. Koçaksan manure seperator allocate the liquid screw including liquid and solid materials by spiral system. It can be arrange the huminity rate thanks to force arm on the exit cover.

MATERIAL	CAST,CHROME
ENGINE POWER	5.5 kw
PLATFORM	yes
CONTROL PANEL	yes
CAPASİTE	20 m³











TYPE	PLUNGE PUMP
MATERIAL	CAST BODY
ENGINE POWER	5-7.5-11-15 kw
PLATFORM	YES
CONTROL PANEL	YES
CAPASITE	120 TONS / PER HOUR

Koçaksan fertilizer pump have been designed to pump the manure. It's hard for producers to pumping the manure. This fertilizer pump system is prefered specailly above gathering pool to getting easy to pump manure with least power and labour force. Fertilizer pump can be designed according to pool depth. It can be setup the in the pool wall vertically







#### SUBMIRSIBLE MANURE MIXER





Koçaksan submirsible mixer have been produced to mix manure.

Mixer is being produced with two wing to mix the manure least time.

Koçaksan manure mixer have been covered special paint and protecting layer.

This mixer can be easily move up-down side easyli thanks to its lifter.

TYPE	SUBMIRSIBLE MIXER
MATERIAL	CASTIN BODY
ENGINE POWER	11 - 15 kw
PLATFORM	YES
CONTROL PANEL	YES
CAPASITE	5000 - 6500 m <sup>3</sup>

















TYPE	PIPED SYSTEM
MATERIAL	CORROSION RESISTANT / GALVANIZED
ENGINE POWER	7,5 - 11 kw
PLATFORM	NO
CONTROL PANEL	YES
CAPASITE	5000 - 6500 m³

Koçaksan mixer is being produced with two or three wing. Wing shape and angle has been designed to mix in the least time. It's covered with special protecting paint and layer to corrosion.








### SWINGING COW BRUSH



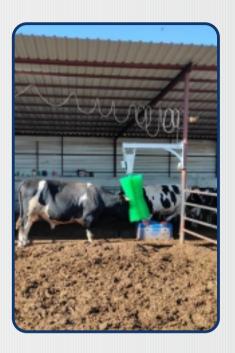

Koçaksan swinging brush have been designed to be healthy and happy of animals. This automatic brush will be the most enjoyble thing your animals and farms. Swinging brush does care of your animals so, it can be produced much more milk and meat affectivly.

TYPE	MOUNTED ON WALL
BRUSH DIAMETER	46 CM
ENGINE POWER	0,18 kw
CENCOR	YES
VOLTAGE-FREQUENCY	220 V - 50 Hz
TURNING SPEED	30 dev/dk (rpm)













MATERIAL HEAT TREATENED GALVENIZED

PIPE DIAMETER 48\*3 mm

INVIDUAL LOCK YES

SIZE 60 - 75 cm

HEIGHT 95 cm

Koçaksan feeding lock system provides to feed animals truely. Also, presents safety and comfort to your animals. You may seperate as group your animals. The locking system has been designed for without disturb your animals. The feeding lock system is the effective way of the protect your animals health and their breast.







#### > IRON BED SYSTEM





Koçaksan animal bed station has been designed for animals comfort and their safely resting.

It's known as, if an animal stay longer one hour per day their milk increases approxematly 1.5 liters.

The material as always has been covered with protecting paint and galvanize.

Producing and montege is being done by our technical service.

MATERIAL	HEAT TREATENED GALVANIZED
PIPE DIAMETER	42*3 mm / 60*3 mm
ADJUSTABLE	YES
SIZE	170*120 - 120*190 cm













MATERIAL	NATURAL RUBBER
SIZE	110*190*2 cm
LAYER	1
DRAINAGE SYSTEM	170*120 - 120*190 cm
GROUND STRUCTURE	ELIPS FLOOR AND ELASTIC WINGS

The animals efficient is depanding directly their healthy. It should be under-controlled their eating food and drinking water. The important thing is the water must be clear and higyenic. Our drinking stations is being produced for their comfort and health. Also, it is produced to easily turned and cleaned. Koçsan drinking station has standart of the AISI 304, which is stainless drinking station can be setup according your prefer as stand up or mounted on the wall.







## ROTARY DRINKING STATION







The animals efficient is depanding directly their healthy. It should be under-controlled their eating food and drinking water. The important thing is the water must be clear and higyenic. Our drinking stations is being produced for their comfort and health. Also, it is produced to easily turned and cleaned.

Koçsan drinking station has standart of the AISI 304, which is stainless drinking station can be setup according your prefer as stand up or mounted on the wall.

TYPE	ROTARY
MATERIAL	STAINLESS CHROME
CAPACITY	100-150-200 rt
COMPONENT	1
SIZE	125*40*25 - 150*40*25 - 200*40*25 cm
YÜKSEKLİK	76 cm







# DOUBLE BATCH NON - FREEZING WATERER









Koçaksan water curb has been produced polyeliten plastic metarial %100. There is two balls. It will be enough for by 25 cattles. Two cattle can use this station at the same time. Also, It provides efficent increase by %35. It can be used with machine water or storage water.

TYPE	NON-FREEZING
MATERIAL	POLYELITEN
CAPASITY	80 lt
COMPANENT	2 PLACE
SIZE	100*60*45 cm

Drinking station is heated dipping galvanize.
You don't need do anything because of the automatic buoy system. Buoy system prevent to lack of the water level. It can be montagne on the wall or on the ground according your prefer.

TYPE	STABLE
MATERIAL	2,5 MM heated dipping galvanize
CAPACITY	17 lt
COMPANENT	1-2
SIZE	56*24*13 cm







> S THIGTING

U THIGTING

PLASTIC > LOCKING WEDGE

> ROPE PULLEY

> CHAIN PULLEY











> STONE DRINKER



HEAT TREATED
CHAIN 13 MM

2.5 LT
PLASTIC DRINKER

MANGER

LOCKING SYSTEM


















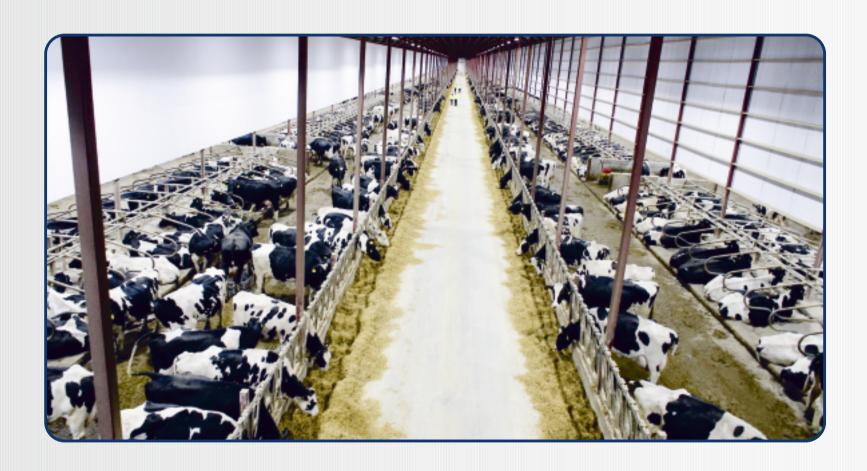





- +90.332 342 59 57
   1 +90.530 882 60 68
   2 bilgi@kocaksan.com
   ⊕ www.kocaksan.com
- Q Fevzi Çakmak Mh. İmsan San. Sit. 10756. Sk. No:2/F Karatay/Konya

